
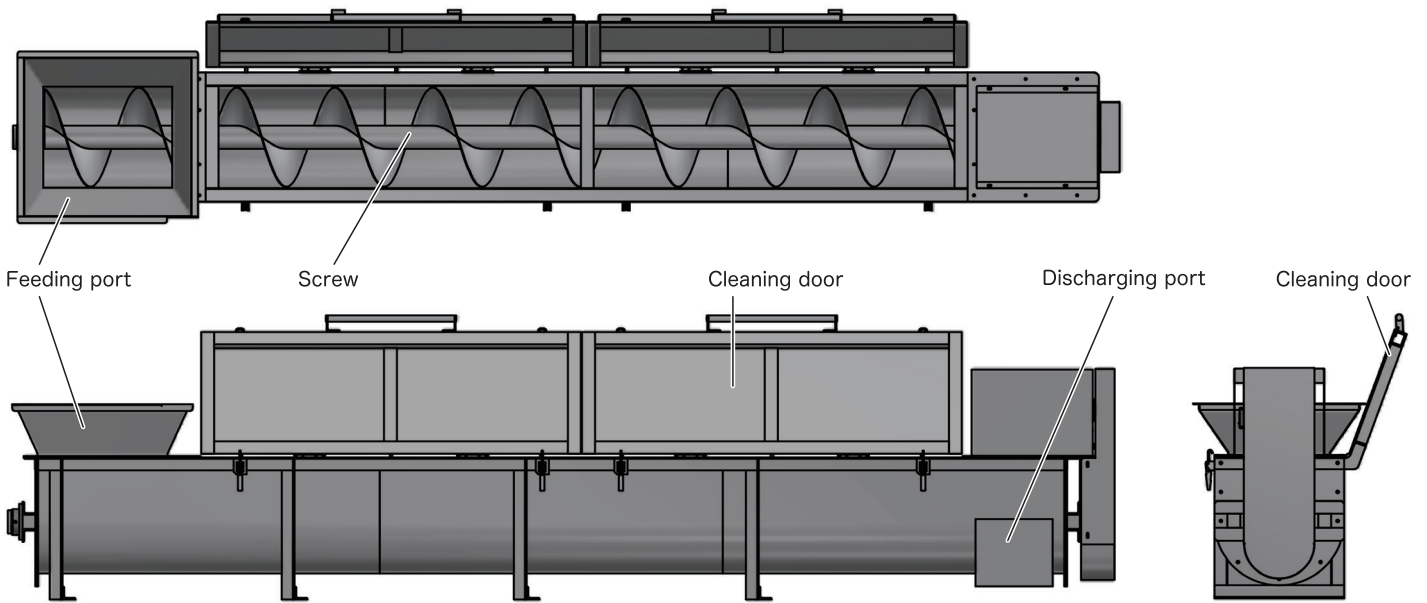


U groove type screw conveyor

Dust generation while transporting is less and easy to response shattering.

Features

- All stainless-steel screw conveyor with excellent sanitation.
- Maintenance/cleaning is easy and can be washed.
- Closed structured manufacturing correspondence is possible.
- Structures according to the transporting material & installing place.
- Can be set to the angle to 30°

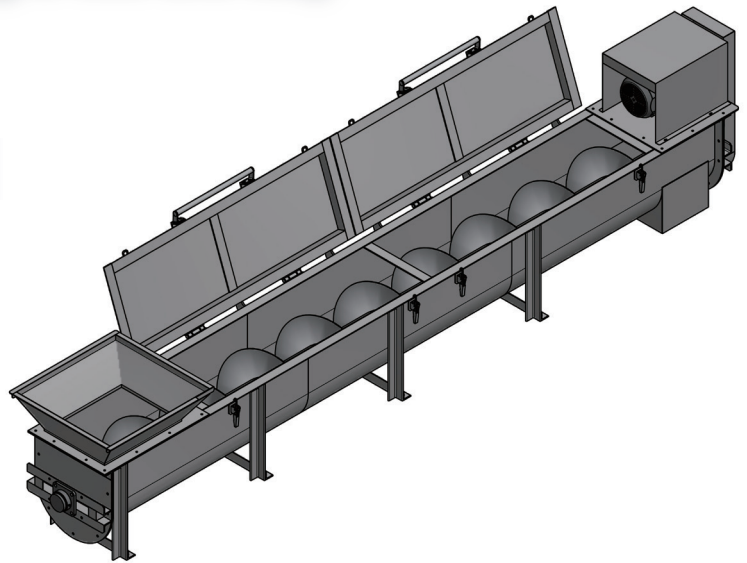

Specifications

Type	Conveying shaft full length	Groove radius	Power	Conveying ability (General sencha)
	mm	mm	kW	kg/h
SCC	100 ~ 4,000	20 ~ 200	Select each time	MAX 1,700

Suitable: Non-viscous powder, grains etc.

Remarks: Transfer test is needed when ordering.

When setting angle, according to the angle, conveying ability decreases.
Conveying ability differs according to the material.

※Part of the specifications might be changed for improvement.

TERADA 株式会社 寺田製作所
TERADA SEISAKUSHO CO.,LTD.

No.869-1 Ushio Shimada-shi Shizuoka-ken 428-8502 Japan
Phone : +81-547-45-5111 Fax : +81-547-45-5110
<https://www.web-terada.jp> E-mail: info@web-terada.jp

● Sales agent

