## **Automatic water sprinkler**








## **Features**

- Automatic water sprinkling with easy operation.
- $\bullet$  Sprinkling times can be selected from  $1\sim6$ .
- Buzzer rings to inform operation finish.
- Running wheel width can be changed according to installed existing rail.
- low center gravity structure, considered fall prevention.
- Battery (40B19L type) can be removed easily & maintenance is easy.
- Real hose length can be selected from 50m & 60m two types.

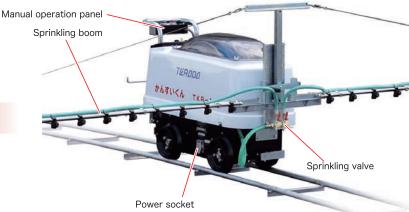



Operation panel

## ■ Specifications

\*1,\*2 Length of boom & spraying port count differs according to the object & water amount, discuss with agent or TERADA.

Туре	Length		Maximum width *1 (Boom opened)		Boom height (From ground)	Weight	Power	Running speed	Max sprinkling capacity%2
	mm	mm	mm	mm	mm	kg	W	m/min	L/min
TKR-1	1,300	456	8,300	750	約320~720	120	14	10.6	38

\*Rail can be prepared from 5.5m unit.

\*Part of the specifications might be changed for improvement.

## TERADA SEISAKUSHO CO.,LTD.

No.869-1 Ushio Shimada-shi Shizuoka-ken 428-8502 Japan

Phone: +81-547-45-5111 Fax: +81-547-45-5110

https://www.web-terada.jp E-mail:info@web-terada.jp

Sales agent



TR101E-00 Jan.2022