

High range moisture controlling system

TERADA

SYS-100MF "SHITORI"


When manufacturing tea, measures tea leaf moisture with a high range moisture meter & shows in graph.

■ High range moisture controlling system

"SHITORI" control panel




Can be exchanged since conventional high range moisture controlling system "SHITORI" control panel is compatible with SYS-100ME.

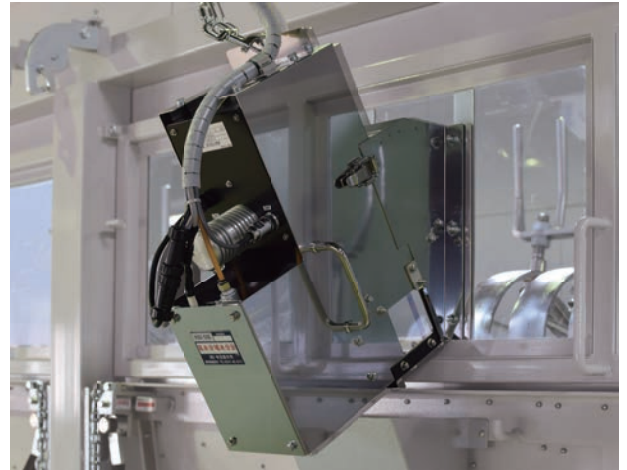

Near infrared moisture measuring sampling unit (For high moisture range) ASU-SSE

For tea scattering dryer (Continuous type):SYS-100MF-SS

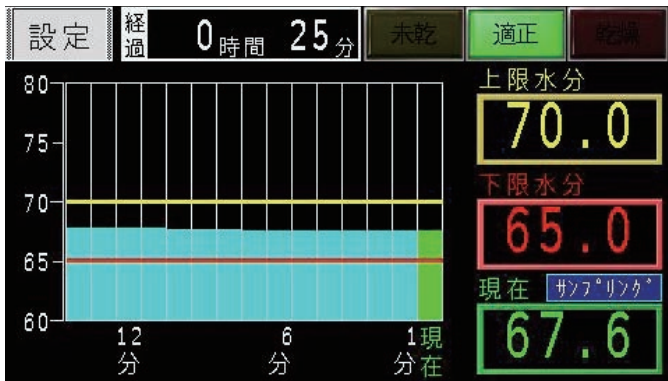

When tea scattering dryer (Continuous type), measures moisture in 2nd room (2nd process room). Informs with a buzzer when tea leaf moisture goes out of set range.


Error display



When occurs error, can respond properly since cause & content displays.

※These controllers are ready to English caption.

For tea scattering dryer (Batch type) /Wide primary tea rolling dryer : SYS-100MF-H

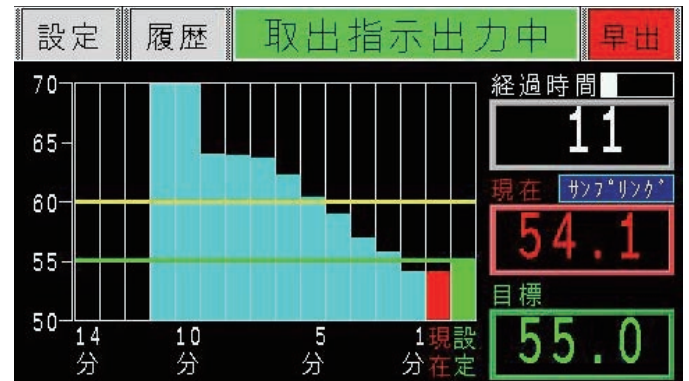

Process moisture measuring after receiving signal in tea scattering dryer (Batch type) & wide primary tea rolling dryer.



By setting a tower light as an option, state can be checked also from a far position.

※Part of the specifications might be changed for improvement.

TERADA 株式会社 寺田製作所
TERADA SEISAKUSHO CO.,LTD.

No.869-1 Ushio Shimada-shi Shizuoka-ken 428-8502 Japan
Phone : +81-547-45-5111 Fax : +81-547-45-5110
<https://www.web-terada.jp> E-mail:info@web-terada.jp

● Sales agent

