

# Green tea chopper

TERADA



By adding to green tea line, improves the efficiency & extractability.




Input screw



Discharging port

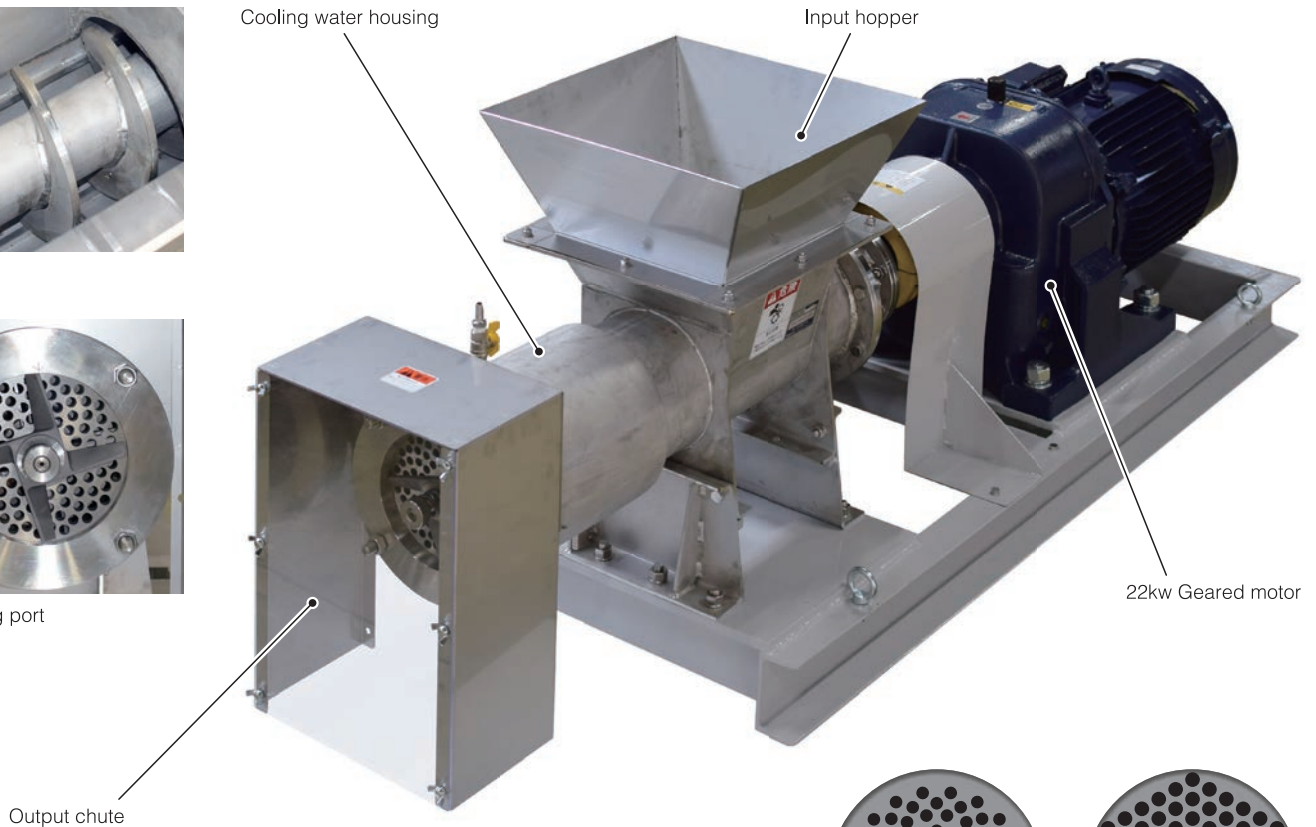

12mm holed plate



16mm holed plate

## Features

- Mince the tea with a powerful motor.
- Tea touching area is made of hygienic stainless steel.
- Housing is of double structured water cooling which controls the heat & prevents tea leaf color, quality changing.
- Stainless material is used for edge plate & knife which makes most suitable cutting & crushing for green tea manufacturing.
- Excellent in sanitary since plate internal & external blade, screw are structured to be assembled/detached easily.
- Standard plates can be selected from holed 12mm & 16mm. ( Optionally 10mm & 20mm can be arranged, please contact for other sizes. )

## Specifications

※1. Processing capacity W.B. 50% moisture is standard when inputting. Differs according to moisture, state when input.

Type	Length	Width	Height	Weight	Power	Capacity (Fresh tea leaves)
	mm	mm	mm	kg	kW	kg/h
TCH-72	2,270	630	640	700	22	500 ※1

※Input stand is required additionally. Arrange a stand suitable for customer layout.

※Part of the specifications might be changed for improvement.

**TERADA 株式会社 寺田製作所**  
TERADA SEISAKUSHO CO.,LTD.

No.869-1 Ushio Shimada-shi Shizuoka-ken 428-8502 Japan  
Phone : +81-547-45-5111 Fax : +81-547-45-5110  
<https://www.web-terada.jp> E-mail:info@web-terada.jp

● Sales agent

