

Pneumatic separator



Supports quality improvement of final tea rolling dryer with super-efficient weight sorting.




Split leaves collector (Only WS-3)

Stalk discharging port (Standard is screw conveyor)

WS-3

Product discharging port

Material feeding port

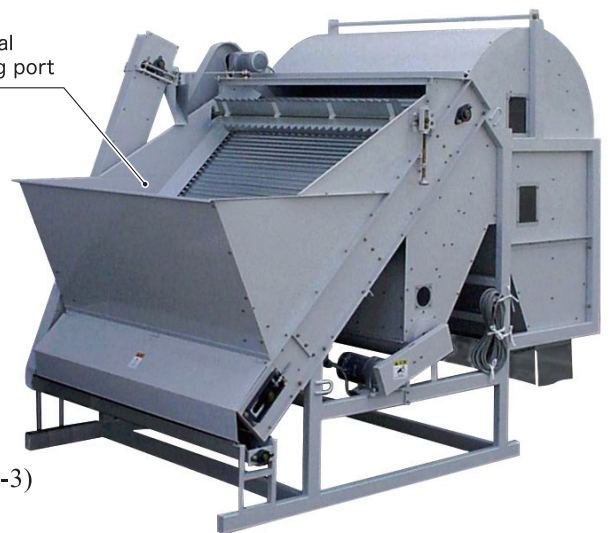

Features

- Separates stalks (Red stalks) from leaf using the wind according to weight comparison.
- Processing capacity 7000kg/h (WS-2) • 1,000kg/h (WS-3) in green leaf conversion.
- Meticulous setting is possible for elevator & fan according to the inverter control.
- According to the circulating method tea powder won't spread outside & it is hygienic.
- Cleaning can be done easily with the split leaves collector. (Only WS-3)

Specifications

Type	Length mm	Width mm	Height mm	Crawler width mm	Weight kg	Power				Processing capacity (Leaf conversion) kg/h
						Elevator kW	Fan kW	Screw kW	Collecting device kW	
WS-2	2,820	1,720	2,415	1,040	780	0.2	1.5	0.4	-	700
WS-3	2,820	2,190	2,415	1,510	900	0.2	2.2	0.4	0.09	1,000

※Part of the specifications might be changed for improvement.

TERADA 株式会社 寺田製作所
TERADA SEISAKUSHO CO.,LTD.

No.869-1 Ushio Shimada-shi Shizuoka-ken 428-8502 Japan
Phone : +81-547-45-5111 Fax : +81-547-45-5110
<https://www.web-terada.jp> E-mail: info@web-terada.jp

● Sales agent

